
## Appendix A

## Contents of appendix A

Fig. S1. Summary of bentonite/soil and OPC/soil ratios in SCB cutoff wall backfill mix designs reported in the literature.

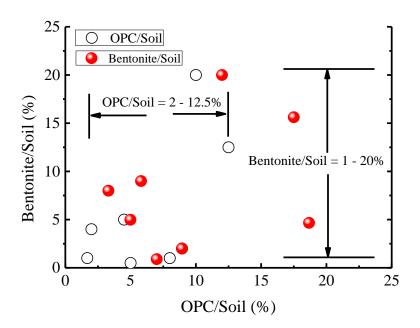

## References

- Ryan, C. R., & Day, S. R. (2002). Soil-cement-bentonite slurry walls. In Deep Foundations 2002: An International Perspective on Theory, Design, Construction, and Performance (pp. 713-727).
- Ruffing, D. G., & Evans, J. C. (2014). Case Study: Construction and in situ hydraulic conductivity evaluation of a deep soil-cement-bentonite cutoff wall. In Geo-Congress 2014: Geo-characterization and Modeling for Sustainability (pp. 1836-1848).
- Cermak J, Evans J, Tamaro GJ. Evaluation of Soil-Cement-Bentonite Wall Performance-Effects of Backfill Shrinkage. In Grouting and Deep Mixing 2012 2012 (pp. 502-511).
- Owaidat, L. M., Andromalos, K. B., Sisley, J. L., & Civil Engineer, U. (1999, October).

  Construction of a soil–cement-bentonite slurry wall for a levee strengthening program.

- In Proceedings of the 1999 Annual Conference of the Association of State Dam Safety Officials, St. Louis, Mo (pp. 10-13).
- Dinneen, E. A., & Sheskier, M. (1997). Design of soil-cement-bentonite cut-off wall for Twin Buttes Dam. In Proceedings of USCOLD Annual Meeting, San Diego, California, April (pp. 7-11).
- Heineck KS, Lemos RG, Lautenschlager CE, Consoli NC. Behavior of Vertical Hydraulic Barriers Composed by Sandy Soil, Bentonite, and Cement Subjected to Alkaline Contaminants. InGeoFlorida 2010: Advances in Analysis, Modeling & Design 2010 (pp. 2462-2471)