

## matchms - processing and similarity evaluation of mass spectrometry data.

Florian Huber<sup>1</sup>, Stefan Verhoeven<sup>1</sup>, Christiaan Meijer<sup>1</sup>, Hanno Spreeuw<sup>1</sup>, Efraín Manuel Villanueva Castilla<sup>2</sup>, Cunliang Geng<sup>1</sup>, Justin J. J. van der Hooft<sup>3</sup>, Simon Rogers<sup>2</sup>, Adam Belloum<sup>1</sup>, Faruk Diblen<sup>1</sup>, and Jurriaan H. Spaaks<sup>1</sup>

<sup>1</sup> Netherlands eScience Center, Science Park 140, 1098XG Amsterdam, The Netherlands <sup>2</sup> School of Computing Science, University of Glasgow, Glasgow, United Kingdom <sup>3</sup> Bioinformatics Group, Plant Sciences Group, University of Wageningen, Wageningen, the Netherlands

DOI: [10.21105/joss.02411](https://doi.org/10.21105/joss.02411)

### Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

---

Editor: [Arfon Smith](#) ↗

### Reviewers:

- [@bittremieux](#)
- [@kaibioinfo](#)

Submitted: 26 June 2020

Published: 31 August 2020


### License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

## Summary

Mass spectrometry data is at the heart of numerous applications in the biomedical and life sciences. With growing use of high-throughput techniques, researchers need to analyze larger and more complex datasets. In particular through joint effort in the research community, fragmentation mass spectrometry datasets are growing in size and number. Platforms such as MassBank (Horai et al., 2010), GNPS (Wang et al., 2016) or MetaboLights (Haug et al., 2020) serve as an open-access hub for sharing of raw, processed, or annotated fragmentation mass spectrometry data. Without suitable tools, however, exploitation of such datasets remains overly challenging. In particular, large collected datasets contain data acquired using different instruments and measurement conditions, and can further contain a significant fraction of inconsistent, wrongly labeled, or incorrect metadata (annotations).

`matchms` is an open-source Python package to import, process, clean, and compare mass spectrometry data (MS/MS) (see [Figure 1](#)). It allows to implement and run an easy-to-follow, easy-to-reproduce workflow from raw mass spectra to pre- and post-processed spectral data. Raw data can be imported from the commonly used formats `mzML` (Martens et al., 2011), `mzXML`, `MGF` (`mzML`, `mzXML`, `MGF` file importers are built on top of `pyteomics` (Goloborodko, Levitsky, Ivanov, & Gorshkov, 2013; Levitsky, Klein, Ivanov, & Gorshkov, 2019), as well as from JSON files (as provided by GNPS), but also via Universal Spectrum Identifiers (USI) (Wang et al., 2020). Further data formats or more extensive options regarding metadata parsing can best be handled by using `pyteomics` (Levitsky et al., 2019) or `pymzml` (Kösters et al., 2018). `matchms` contains numerous metadata cleaning and harmonizing filter functions that can easily be stacked to construct a desired pipeline ([Figure 2](#)), which can also easily be extended by custom functions wherever needed. Available filters include extensive cleaning, correcting, checking of key metadata fields such as compound name, structure annotations (InChI, SMILES, InChIKey), ionmode, adduct, or charge. Many of the provided metadata cleaning filters were designed for handling and improving GNPS-style `MGF` or JSON datasets. For future versions, however, we aim to further extend this to other commonly used public databases.

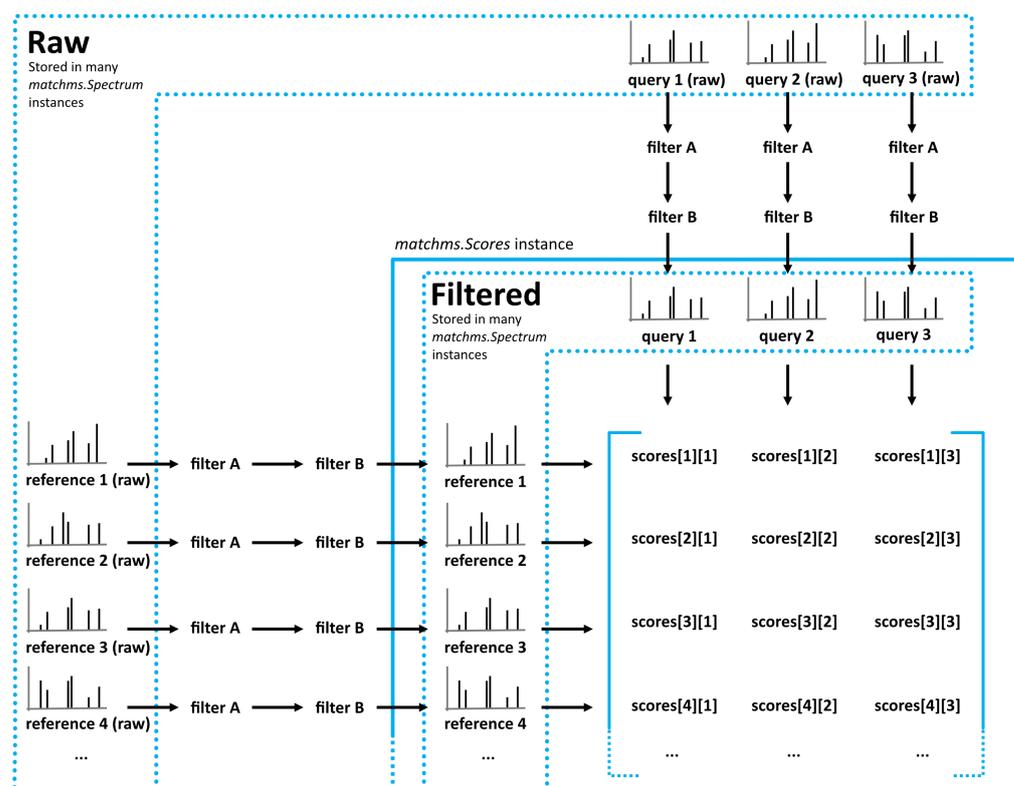

**Figure 1:** Flowchart of `matchms` workflow. Reference and query spectrums are filtered using the same set of set filters (here: filter A and filter B). Once filtered, every reference spectrum is compared to every query spectrum using the `matchms.Scores` object.

Current Python tools for working with MS/MS data include `pyOpenMS` (Röst, Schmitt, Abersold, & Malmström, 2014), a wrapper for `OpenMS` (Röst et al., 2016) with a strong focus on processing and filtering of raw mass spectral data. `pyOpenMS` has a wide range of peak processing functions which can be used to further complement a `matchms` filtering pipeline. Another, more lightweight and native Python package with a focus on spectra visualization is `spectrum_utils` (Bittremieux, 2020). `matchms` focuses on comparing and linking large number of mass spectra. Many of its built-in filters are aimed at handling large mass spectra datasets from common public data libraries such as GNPS.

`matchms` provides functions to derive different similarity scores between spectra. Those include the established spectra-based measures of the cosine score or modified cosine score (Watrous et al., 2012). The package also offers fast implementations of common similarity measures (Dice, Jaccard, Cosine) that can be used to compute similarity scores between molecular fingerprints (`rdkit`, `morgan1`, `morgan2`, `morgan3`, all implemented using `rdkit` (Landrum, n.d.)). `matchms` facilitates easily deriving similarity measures between large number of spectra at comparably fast speed due to score implementations based on NumPy (Walt, Colbert, & Varoquaux, 2011), SciPy (Virtanen et al., 2020), and Numba (Lam, Pitrou, & Seibert, 2015). Additional similarity measures can easily be added using the `matchms` API. The provided API also allows to quickly compare, sort, and inspect query versus reference spectra using either the included similarity scores or added custom measures. The API was designed to be easily extensible so that users can add their own filters for spectra processing, or their own similarity functions for spectral comparisons. The present set of filters and similarity functions was mostly geared towards smaller molecules and natural compounds, but it could easily be extended by functions specific to larger peptides or proteins.

matchms is freely accessible either as conda package (<https://anaconda.org/nlesc/matchms>), or in form of source-code on GitHub (<https://github.com/matchms/matchms>). For further code examples and documentation see <https://matchms.readthedocs.io/en/latest/>. All main functions are covered by tests and continuous integration to offer reliable functionality. We explicitly value future contributions from a mass spectrometry interested community and hope that matchms can serve as a reliable and accessible entry point for handling complex mass spectrometry datasets using Python.

## Example workflow

A typical workflow with matchms looks as indicated in [Figure 1](#), or as described in the following code example.

```
from matchms.importing import load_from_mgf
from matchms.filtering import default_filters
from matchms.filtering import normalize_intensities
from matchms import calculate_scores
from matchms.similarity import CosineGreedy

# Read spectrums from a MGF formatted file
file = load_from_mgf("all_your_spectrums.mgf")


# Apply filters to clean and enhance each spectrum
spectrums = []
for spectrum in file:
    spectrum = default_filters(spectrum)
    spectrum = normalize_intensities(spectrum)
    spectrums.append(spectrum)

# Calculate Cosine similarity scores between all spectrums
scores = calculate_scores(references=spectrums,
                          queries=spectrums,
                          similarity_function=CosineGreedy())

# Print the calculated scores for each spectrum pair
for score in scores:
    (reference, query, score, n_matching) = score
    # Ignore scores between same spectrum and
    # pairs which have less than 20 peaks in common
    if reference is not query and n_matching >= 20:
        print(f"Reference scan id: {reference.metadata['scans']}")
        print(f"Query scan id: {query.metadata['scans']}")
        print(f"Score: {score:.4f}")
        print(f"Number of matching peaks: {n_matching}")
        print("-----")
```

## Spectrum processing

matchms.filtering contains numerous filters that can be combined to build a desired pre-processing pipeline.

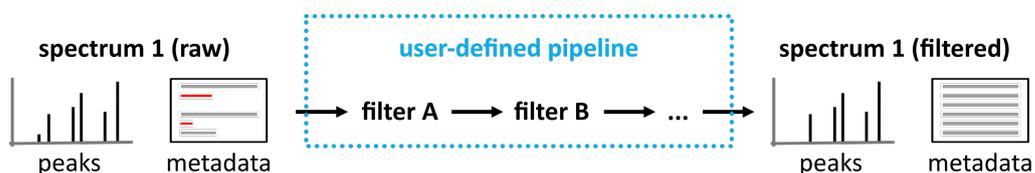

### Provided filters to clean, correct, harmonize metadata include:

- Harmonize field entries (ionmode, charge etc.).
- Remove non-compound name parts from name field.
- Extract adduct from given name field.
- Set ionmode if missing.
- Check and correct charge entry (sign).
- Add proper precursor- $m/z$  and parent mass values.
- Find and correct misplaced annotations (InChIKey given as InChI etc.).
- Derive missing annotations where possible (convert between InChI and SMILES and create missing InChIKeys).

### Provided filters to process spectrum peaks include:

- Normalize peak intensities.
- Remove peaks outside set  $m/z$  window.
- Remove peaks outside set intensity window.
- Reduce the number of peaks to desired range.
- Add neutral losses within set  $m/z$  range.

**Figure 2:** matchms provides a range of filter functions to process spectrum peaks and metadata. Filters can easily be stacked and combined to build a desired pipeline. The API also makes it easy to extend customer pipelines by adding own filter functions.

## Processing spectrum peaks and plotting

matchms provides numerous filters to process mass spectra peaks. Below a simple example to remove low intensity peaks from a spectrum ([Figure 3](#)).

```
from matchms.filtering import require_minimum_number_of_peaks
from matchms.filtering import select_by_mz
from matchms.filtering import select_by_relative_intensity


def process_peaks(s):
    s = select_by_mz(s, mz_from=0, mz_to=1000)
    s = select_by_relative_intensity(s, intensity_from=0.001)
    s = require_minimum_number_of_peaks(s, n_required=10)
    return s

# Apply processing steps to spectra (here to a single "spectrum_raw")
spectrum_processed = process_peaks(spectrum_raw)

# Plot raw spectrum (all and zoomed in)
spectrum_raw.plot()
spectrum_raw.plot(intensity_to=0.02)

# Plot processed spectrum (all and zoomed in)
```

```
spectrum_processed.plot()  
spectrum_processed.plot(intensity_to=0.02)
```

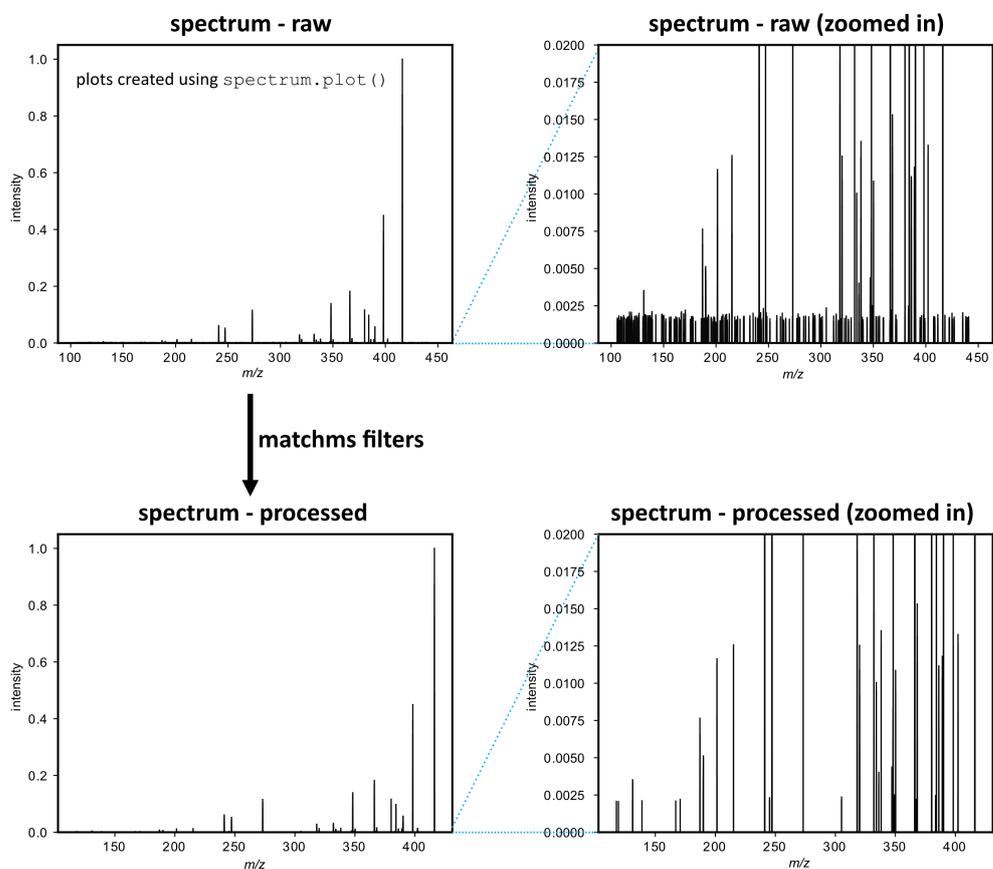

**Figure 3:** Example of matchms peak filtering applied to an actual spectrum using `select_by_relative_intensity` to remove peaks of low relative intensity. Spectra are plotted using the provided `spectrum.plot()` function.

## References

- Bittremieux, W. (2020). Spectrum\_utils: A Python Package for Mass Spectrometry Data Processing and Visualization. *Analytical Chemistry*, 92(1), 659–661. doi:[10.1021/acs.analchem.9b04884](https://doi.org/10.1021/acs.analchem.9b04884)
- Goloborodko, A. A., Levitsky, L. I., Ivanov, M. V., & Gorshkov, M. V. (2013). Pyteomics - a Python Framework for Exploratory Data Analysis and Rapid Software Prototyping in Proteomics. *Journal of the American Society for Mass Spectrometry*, 24(2), 301–304. doi:[10.1021/jasms.8b04453](https://doi.org/10.1021/jasms.8b04453)
- Haug, K., Cochrane, K., Nainala, V. C., Williams, M., Chang, J., Jayaseelan, K. V., & O'Donovan, C. (2020). MetaboLights: A resource evolving in response to the needs of its scientific community. *Nucleic Acids Research*, 48(D1), D440–D444. doi:[10.1093/nar/gkz1019](https://doi.org/10.1093/nar/gkz1019)
- Horai, H., Arita, M., Kanaya, S., Nihei, Y., Ikeda, T., Suwa, K., Ojima, Y., et al. (2010). MassBank: A public repository for sharing mass spectral data for life sciences. *Journal of Mass Spectrometry*, 45(7), 703–714. doi:[10.1002/jms.1777](https://doi.org/10.1002/jms.1777)

- Kösters, M., Leufken, J., Schulze, S., Sugimoto, K., Klein, J., Zahedi, R. P., Hippler, M., et al. (2018). pymzML v2.0: Introducing a highly compressed and seekable gzip format. *Bioinformatics*, 34(14), 2513–2514. doi:[10.1093/bioinformatics/bty046](https://doi.org/10.1093/bioinformatics/bty046)
- Lam, S. K., Pitrou, A., & Seibert, S. (2015). Numba: A LLVM-based Python JIT compiler. In *Proceedings of the Second Workshop on the LLVM Compiler Infrastructure in HPC, LLVM '15* (pp. 1–6). Austin, Texas: Association for Computing Machinery. doi:[10.1145/2833157.2833162](https://doi.org/10.1145/2833157.2833162)
- Landrum, G. (n.d.). RDKit: Open-source cheminformatics. Retrieved from <http://www.rdkit.org>
- Levitsky, L. I., Klein, J. A., Ivanov, M. V., & Gorshkov, M. V. (2019). Pyteomics 4.0: Five Years of Development of a Python Proteomics Framework. *Journal of Proteome Research*, 18(2), 709–714. doi:[10.1021/acs.jproteome.8b00717](https://doi.org/10.1021/acs.jproteome.8b00717)
- Martens, L., Chambers, M., Sturm, M., Kessner, D., Levander, F., Shofstahl, J., Tang, W. H., et al. (2011). mzML—a Community Standard for Mass Spectrometry Data. *Molecular & Cellular Proteomics*, 10(1). doi:[10.1074/mcp.R110.000133](https://doi.org/10.1074/mcp.R110.000133)
- Röst, H. L., Sachsenberg, T., Aiche, S., Bielow, C., Weisser, H., Aicheler, F., Andreotti, S., et al. (2016). OpenMS: A flexible open-source software platform for mass spectrometry data analysis. *Nature Methods*, 13(9), 741–748. doi:[10.1038/nmeth.3959](https://doi.org/10.1038/nmeth.3959)
- Röst, H. L., Schmitt, U., Aebersold, R., & Malmström, L. (2014). pyOpenMS: A Python-based interface to the OpenMS mass-spectrometry algorithm library. *PROTEOMICS*, 14(1), 74–77. doi:[10.1002/pmic.201300246](https://doi.org/10.1002/pmic.201300246)
- Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., et al. (2020). SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python. *Nature Methods*, 17, 261–272. doi:[10.1038/s41592-019-0686-2](https://doi.org/10.1038/s41592-019-0686-2)
- Walt, S. van der, Colbert, S. C., & Varoquaux, G. (2011). The NumPy Array: A Structure for Efficient Numerical Computation. *Computing in Science Engineering*, 13(2), 22–30. doi:[10.1109/MCSE.2011.37](https://doi.org/10.1109/MCSE.2011.37)
- Wang, M., Carver, J. J., Phelan, V. V., Sanchez, L. M., Garg, N., Peng, Y., Nguyen, D. D., et al. (2016). Sharing and community curation of mass spectrometry data with global natural products social molecular networking. *Nature Biotechnology*, 34(8), 828–837. doi:[10.1038/nbt.3597](https://doi.org/10.1038/nbt.3597)
- Wang, M., Rogers, S., Bittremieux, W., Chen, C., Dorrestein, P. C., Schymanski, E. L., Schulze, T., et al. (2020). Interactive MS/MS Visualization with the Metabolomics Spectrum Resolver Web Service. *bioRxiv*, 2020.05.09.086066. doi:[10.1101/2020.05.09.086066](https://doi.org/10.1101/2020.05.09.086066)
- Watrous, J., Roach, P., Alexandrov, T., Heath, B. S., Yang, J. Y., Kersten, R. D., Voort, M. van der, et al. (2012). Mass spectral molecular networking of living microbial colonies. *Proceedings of the National Academy of Sciences of the United States of America*, 109(26), E1743–1752. doi:[10.1073/pnas.1203689109](https://doi.org/10.1073/pnas.1203689109)